


Silicone, Vinyl Spacer, Wall Anchor & Expansion Material

Seves Glass Block Inc. | 2501 Chatham Road #4461 Springfield, IL 62704
Phone: 1-440-627-6257 or Toll Free: 1-877-SEVES11 (1-877-738-3711) | www.sevesglassblockinc.com

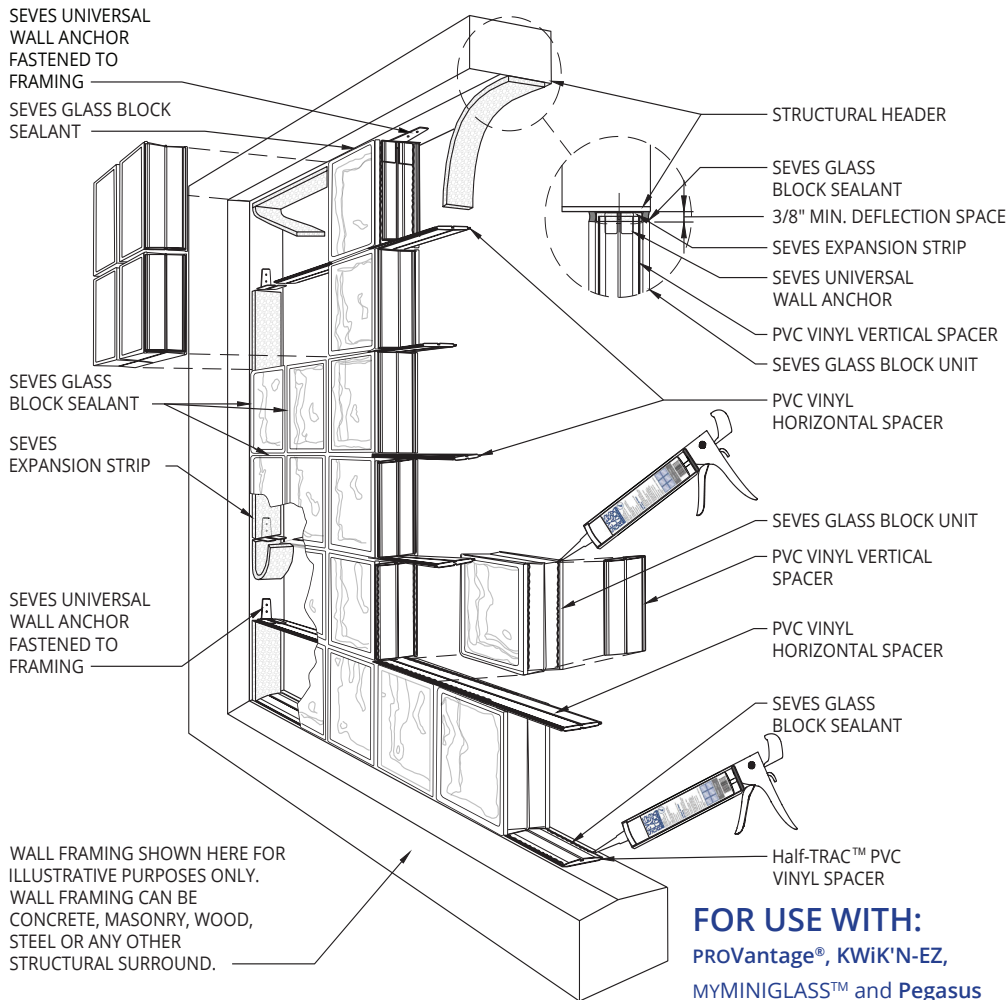

UNIVERSAL WALL ANCHOR:

Stainless Steel AISI Type 304
Material Conformance: ASTM A666, ASTM A480, ASTM A240/A240M, ASTM A167



Polyethylene Foam 3" X 16" X 3/8"


| Physical Properties | Test Method | Value* |
|--|------------------------|---------------|
| Recovery (%) | ASTM D545 05 | 97.8% |
| Extrusion (in) | ASTM D545 05 | 0.12 |
| Compressive Strength (psi) | ASTM D545 05 @ 50% | 14.9 |
| Compression Set (%) | ASTM D3575-00 SUFFIX B | 18.3% |
| Tensile Stress (psi) | ASTM D3575-00 SUFFIX T | 103 / 68 |
| Tear Resistance (lb/in) md/cmd | ASTM D3575-00 SUFFIX G | 14 / 24 |
| Density (lb/ft ³) | ASTM D3575-00 | 1.7 (NOMINAL) |
| Water Absorption (lb/ft ³) | ASTM 545-00 | 0.001 |

Meets Application Requirements of:
ASTM D 4819



Silicone and Vinyl Spacer Construction Assembly

FOR USE WITH:
PROVantage®, KWIK'N-EZ,
MYMINIGLASS™ and Pegasus

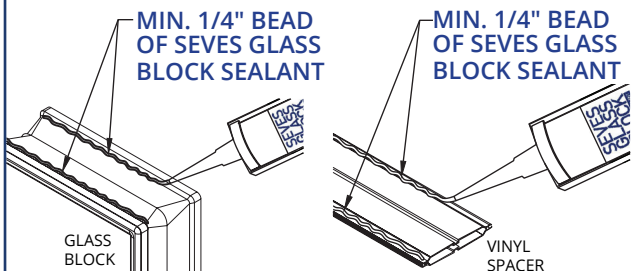


Seves Glass Block Sealant is a one component, low modulus, neutral cure silicone sealant and adhesive specifically formulated to work with Seves PROVantage®, Seves Kwik'N EZ®, MYMINIGLASS™, and Pegasus Glass Block Installation Systems. Seves Glass Block Sealant also bonds to a wide variety of building substrata. This product is specifically formulated to offer all weather performance to meet today's Green Building Standards.



Perimeter Channels

Vinyl perimeter channels for smaller applications. (Residential & light commercial applications. in lieu of Universal Wall Anchors.)



Horizontal/Vertical Vinyl Spacers

Vinyl spacer with groove to accept grout finish. Allows for the use of both silicone or grout external finishes.



Pegasus Vinyl Spacers

Manufactured exclusively to fit the deeper profile of the Pegasus Line Products.

